

Polar®

BURST

Polar® Burst is a satin reflective print media that will vividly catch the eye of any viewer walking by and promote your product in a new and innovative way! Polar® Burst has outstanding reflective qualities that create stunning graphics which retain their vibrancy, no matter what time of day or night, as well as in wet-weather conditions. Approved for both indoor and outdoor use, it is ideal for signage and general advertising applications, as well as POP displays, posters, and other exhibition graphics.

- IDEAL FOR PROMOTIONS
- SUITABLE FOR INDOOR & OUTDOOR USE
- CAN BE EASILY REMOVED

Product Code: PBR

95
micron

Ultra
Reflective
PVC

■
Satin



Latex
UV



Clear Removable
Acrylic
(Pressure Sensitive)




Widths up to 1270mm



EXTERIOR & INTERIOR

Eye Catching Graphics Day or Night

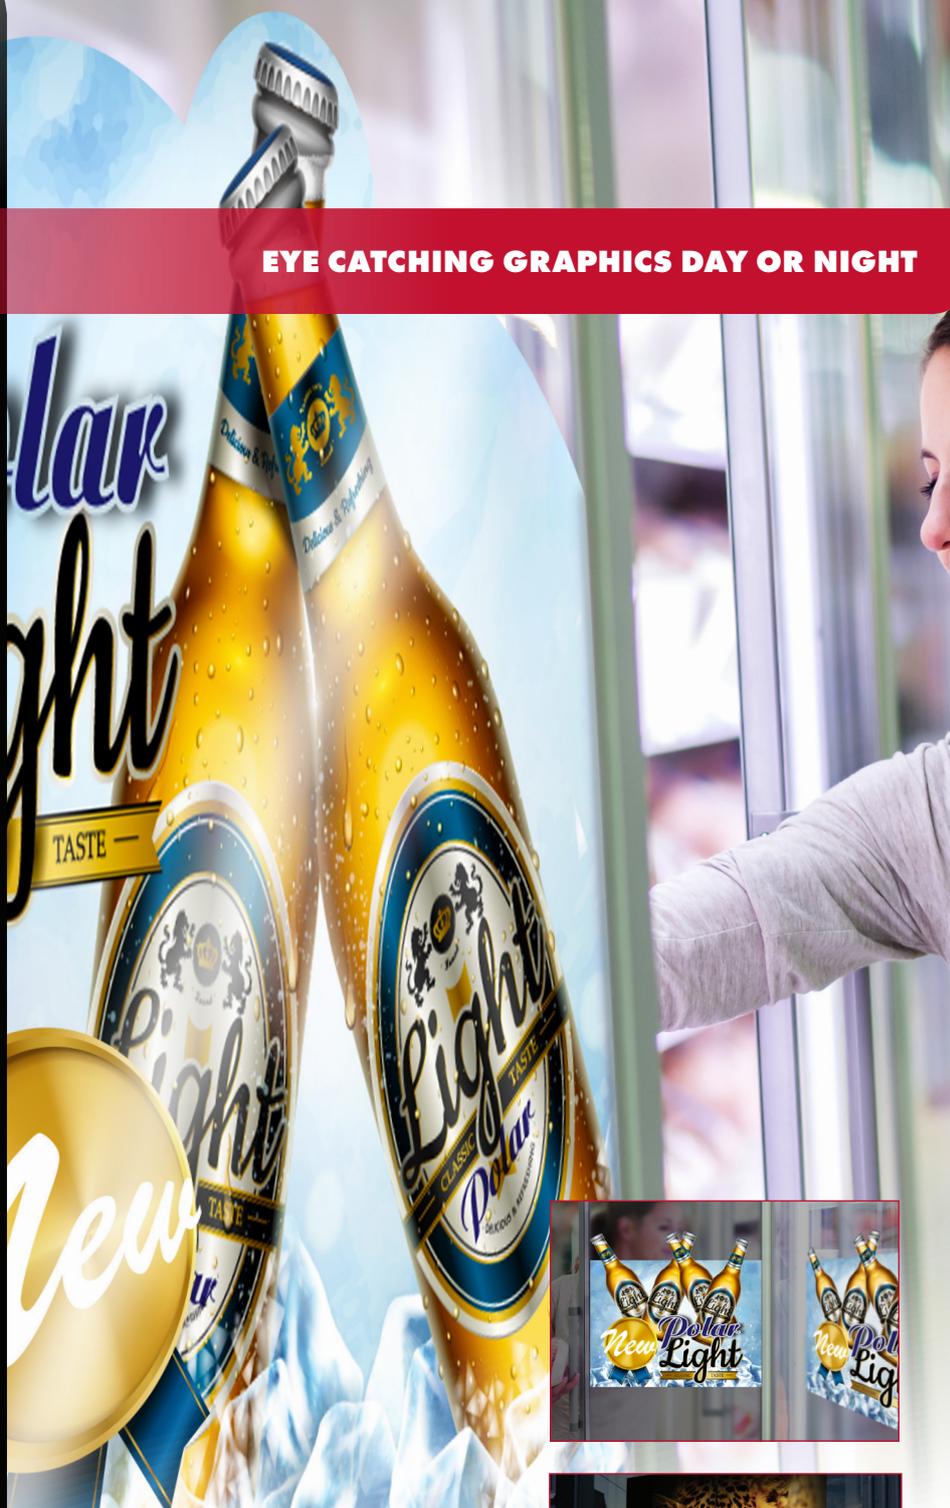

APPLICATIONS

WINDOW GRAPHICS

DECALS & STICKERS

POP DISPLAYS

POS PROMOTIONS



DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

Polar[®]

Burst

Polar[®] Burst is a 95µ (3.7 mil) printable, ultra-reflective satin, self-adhesive PVC film with a high quality, removable clear acrylic adhesive protected by a siliconised PET release liner. Polar[®] Burst has great adhesion to smooth, flat surfaces. Its ultra-reflective qualities create eye-catching graphics, day and night.

- IDEAL FOR PROMOTIONS
- SUITABLE FOR INDOOR & OUTDOOR USE
- CAN BE EASILY REMOVED

For more information, performance and warranty guide lines please contact your local Drytac office.

© 2018 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Satin Reflective PVC
Adhesive	Clear Removable Acrylic (Pressure Sensitive)
Release Liner	Siliconised 1 Side PET

PRODUCT CHARACTERISTIC

Film Thickness	3.7 mil (95µ)	4.7 mil (120µ)
Adhesive Layer	1mil (25µ)	
Film/Adhesive Ratio	3:7.1	
UV Protection Factor	Not Applicable	
Outdoor Durability	3 years	
Application Temperature	>41°F (5°C)	
Service Temperature Range	-4°F to 248°F (-20°C to 120°C)	
Shelf Life	2 years	
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity	

DRYTAC[®]
ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

105 Nuggett Court,
Brampton,
Ontario, L6T 5A9,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5601 Eastport Boulevard,
Richmond,
Virginia, 23231,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

www.drytac.com